



# PRELIMINARY

**340/350 W<sub>p</sub>**  
Power

**HJT**  
Technology Innovation

**19.17%**  
Efficiency

**-0.260%/<sup>°</sup>C**  
Temperatura coefficiente

**25 years**  
Product warranty


**30 years**  
Linear warranty



## X-MAX XL HJT COLOR

Heterojunction High Efficiency solar cells  
Monocrystalline

new

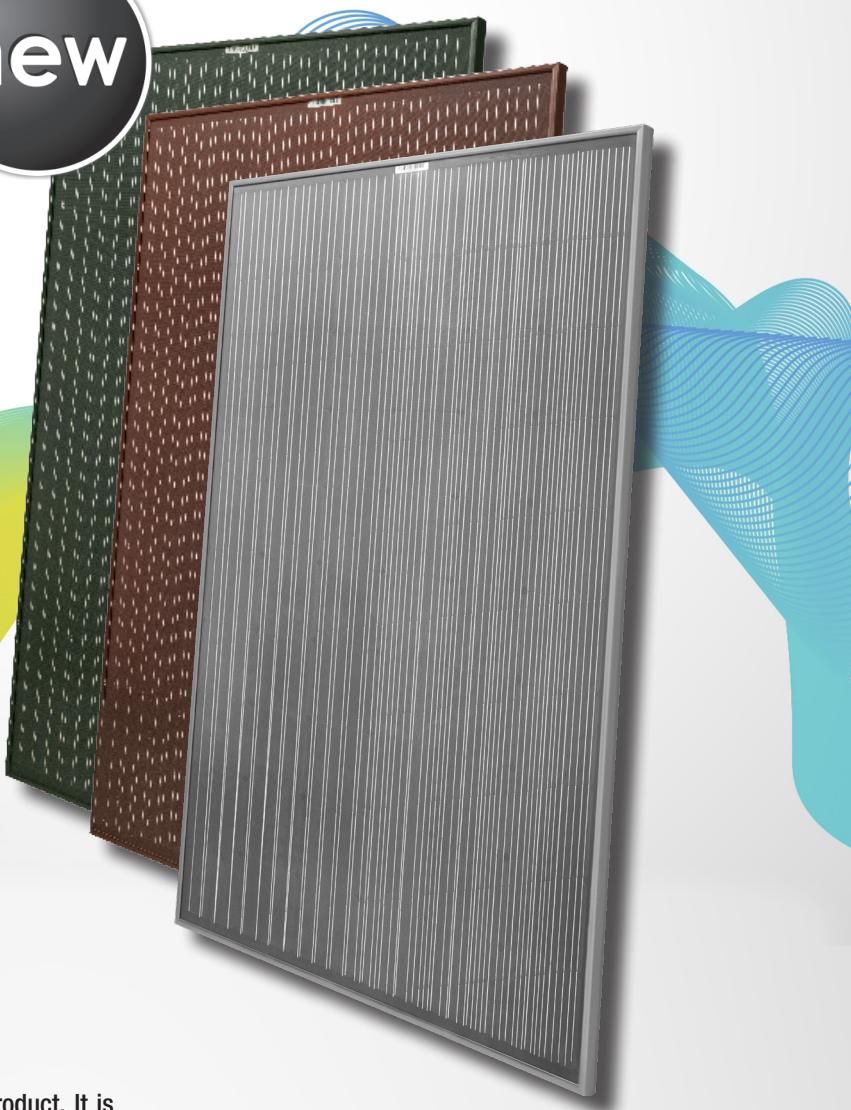

X-MAX XL HJT COLOR is one of a wide range of SUNERG's product. It is manufactured according to IEC 61215, IEC 61730 and CE standards. The innovative technology MICROWIRE SOLAR CELLS consists of copper wires supported by a polymer foil. The wires are coated with a thin low melting point alloy layer, which melts during the module lamination process and builds up a solder contact to the cell metallization.

CONFORM TO

IEC 61215 | IEC 61730 | PV CYCLE | CE

UNI EN ISO 9001:2008

UNI EN ISO 14001:2004

UNI EN ISO 45001:2018

ELECTRICAL DATA (STC)		XMXLJ60340IMC+H (IVB+H)	XMXLJ60345IMC+H (IVB+H)	XMXLJ60350IMC+H (IVB+H)
Open circuit Voltage	(Voc)	43.95 V	44.03 V	44.28 V
Voltage a Pmax.	(VmP)	37.53 V	37.62 V	37.72 V
Short-circuit current	(Isc)	9.72 A	9.77 A	10.09 A
Current at Pmax.	(Imp)	9.06 A	9.18 A	9.28 A
Peak Power (Pmax) Tolerance 0/+5%		340 Wp	345 Wp	350 Wp
Module Efficiency		18.63 %	18.90 %	19.17 %
Maximum voltage		1000 V DC	1000 V DC	1000 V DC
Maximum series fuse rating		20A	20A	20A
Operating Temperature		-40°C - +85°C	-40°C - +85°C	-40°C - +85°C


Tolerance electric measurement and Power output ±3%

\*STC (Standard test conditions)

Irradiance 1000 w/m<sup>2</sup>, Temperature 25°C, AM = 1.5

## TEMPERATURE COEFFICIENT

Pmax Temperature Coefficient	-0.26% / °C
Voc Temperature Coefficient	-0.24% / °C
Isc Temperature Coefficient	0.04% / °C

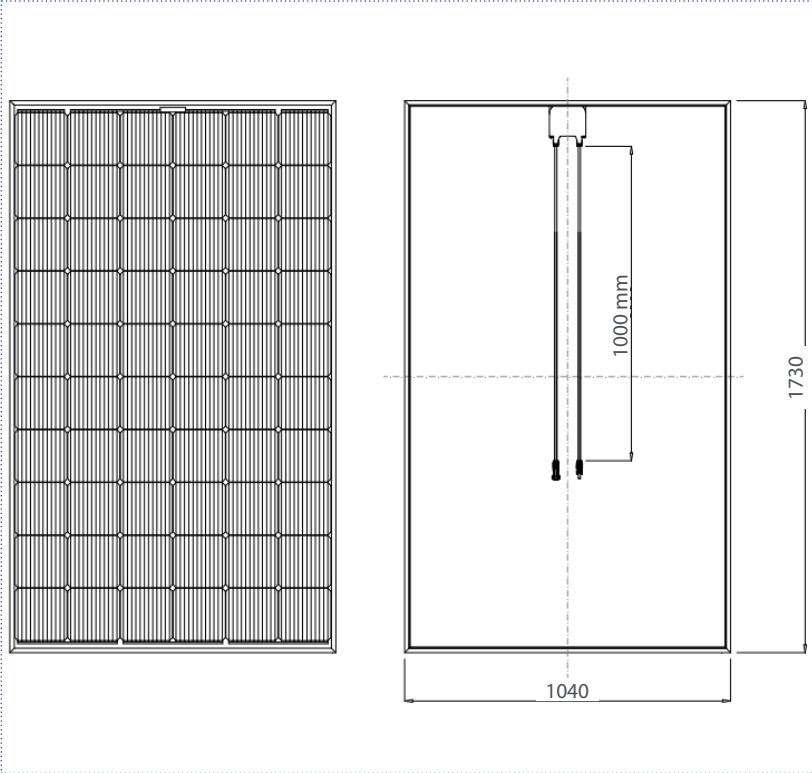


## MECHANICAL CHARACTERISTIC

Dimensions (mm)	1730 x 1040 x 35
Weight (Kg)	19.70
Solar cells type	HJT Mono 166 mm
No. solar cells	60

## GENERAL INFORMATION

Glass	4 mm, high transmission, tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP67
Output Cable - Connectors	4.0mm <sup>2</sup> , 1000 mm MC4 compatible

## LINEAR WARRANTY

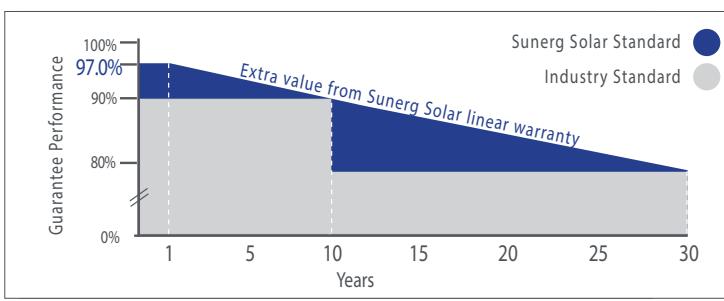

- look warranty terms -

Sunerg Solar S.r.l. reserves the right to make changes to the technical data of the product without prior notice.  
The technical details of the form, although included with the utmost care, may contain errors or inaccuracies not attributable to Sunerg Solar S.r.l.